


- 12 Oxides of nitrogen are produced by the combustion of coal. The percentage of these compounds remaining in emissions can be reduced using the methods named in the graph.

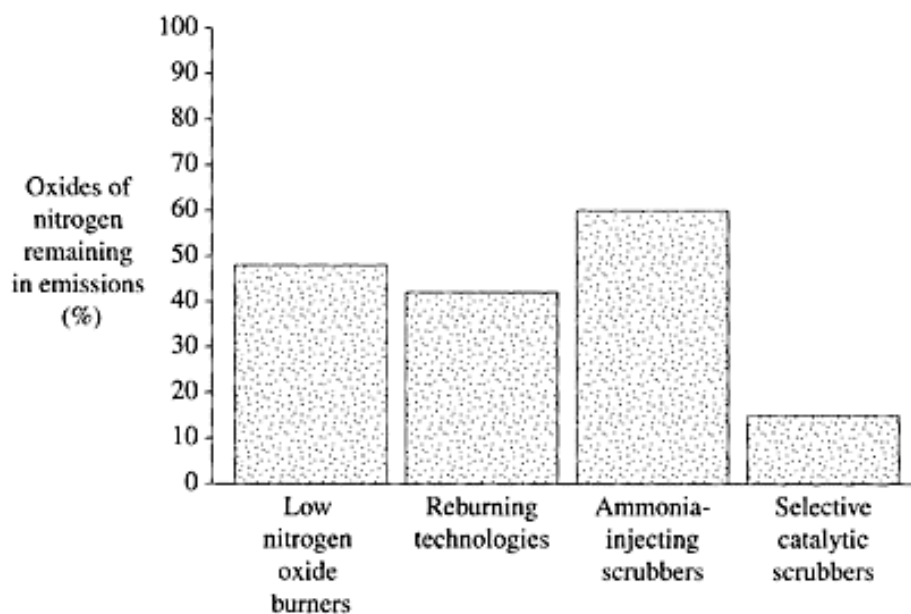


Which of the following is the most effective method for removing oxides of nitrogen produced by the combustion of coal?

- (A) Low nitrogen oxide burners
- (B) Reburning technologies
- (C) Ammonia-injecting scrubbers
- ✓ (D) Selective catalytic scrubbers

	Band 1/2	Band 2/3	Band 3/4	Band 4/5	Band 5/6
A	3.30	2.30	1.10	1.60	0.80
B	2.80	0.60	1.10	1.40	0.30
C	13.20	6.20	6.60	2.90	2.50
D	80.70	90.30	91.20	94.10	96.30
N	0	0.60	0	0	0

Question 12 : % answers correct by band range

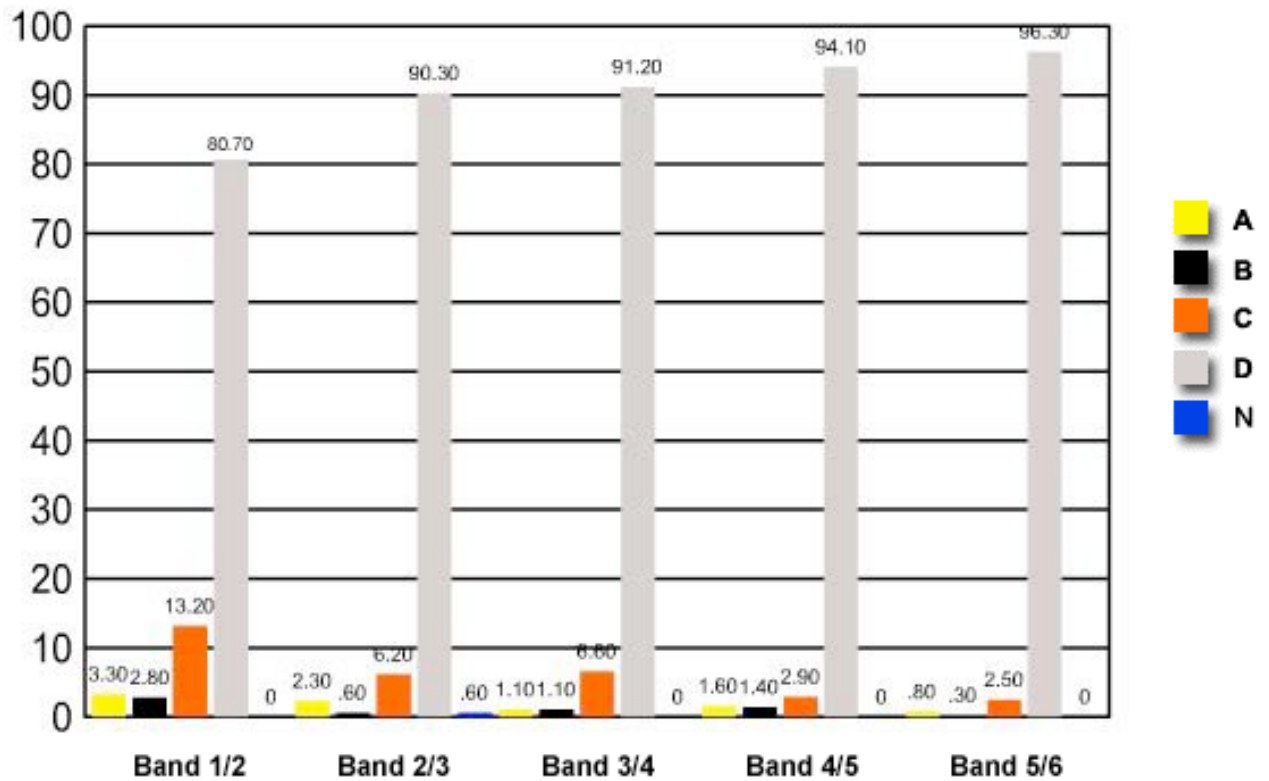

The table and graph show, for the groups of students whose marks in the examination corresponded to the borderline between two bands, what percentages of each group selected the responses A, B, C and D. N is used to identify: No valid response.
